

# ND9608m/16

☀ 8 inch ☀ 300 Watts  
☀ 94.5 dB ☀ 70 ~ 5000 Hz



### KEY FEATURES:

- ① 600 W continuous program power capacity
- ② 94.5dB Sensitivity 1w/1m
- ③ Inverted dust cup for better coupling to a phase plug
- ④ 65mm(2.5") high temperature inside/outside aluminum voice coil
- ⑤ High grade neodymium magnet system, a very light weight
- ⑥ Aluminum demodulating ring for low distortion
- ⑦ Inverted dust cap to minimize the cone distortion and for better coupling to a phase plug
- ⑧ Optimized for the use in line array systems

### GENERAL SPECIFICATIONS

Nominal Diameter	200mm /8inch
Rated Impedance	16 ohm
Nominal Power handling <sup>1</sup>	300 Watts
Program Power <sup>2</sup>	600 Watts
Sensitivity(1w/1m) <sup>3</sup>	94.5 dB
Frequency Range <sup>4</sup>	70 ~ 5000Hz
Minimum Impedance(Zmin)	15.2 ohm
Voice Coil Diameter	65mm /2.5inch
Voice Coil Material	Pure Aluminum
Former Material	Polyimide
Voice Coil Winding Depth	15 mm
Number of layers	2(Inside/Outside)
Magnet gap depth	8 mm
Basket	Cast Aluminum
Flux Density	1.2T
Magnet Material	Neodymium



### THIELE - SMALL PARAMETERS<sup>5</sup>

Resonance frequency	Fs	70 Hz
DC resistance	Re	12.6 ohm
Mechanical factor	Qms	2.9
Electrical factor	Qes	0.41
Total factor	Qts	0.36
Mechanical compliance	Cms	0.22 mm/N
Mechanical resistance of total-driver losses	Rms	3.7 kg/s
Effective Moving Mass	Mms	24.1 g
Half-space efficiency	Eff	1.4 %
BL Factor	BL	18 T.m
Equivalent Cas air load	Vas	17 liters
Effective piston area	Sd	0.0238 m <sup>2</sup>
Max. linear excursion <sup>6</sup>	Xmax	± 6 mm
Max. excursion before damage	Xdam	±15mm
Voice coil inductance(1kHz)	Le	0.63 mH
Efficiency Bandwidth Product	EBP	170

### MOUNTING INFORMATION

Overall Diameter	208.5 mm
Bolt Circle Diameter	196 mm
Bolt Hole Diameter	5.5 mm
Baffle Cutout Diameter	187 mm
Overall Depth	102 mm
Air volume occupied by driver	1 liter
Net Weight	2 kg
Shipping Weight	2.3 kg
Shipping Box	220x220x110mm

Also available in 8ohm, data upon request.

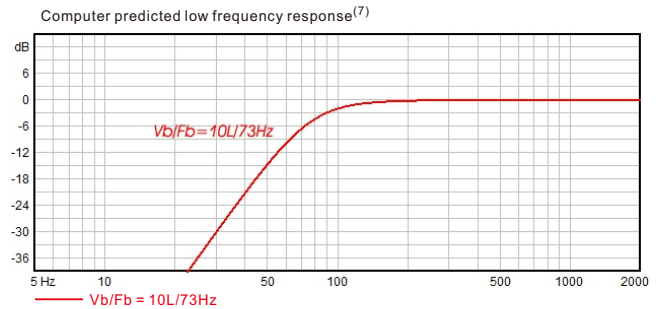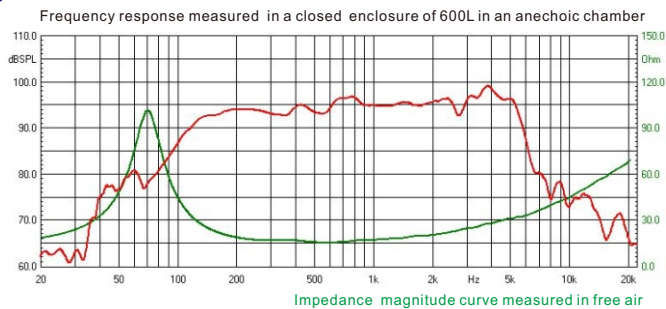

- NOTES:**
1. AES standard
  2. Program Power is defined as 3 dB greater than the nominal power handling.
  3. Sensitivity is measured at 1W input on rated impedance at 1m on axis.
  4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.
  5. T/S parameters measured with laser system BEFORE preconditioning test.
  6. The maximum linear excursion is calculated as: (Hvc-Hg)/2+Hg/4 where Hvc is the voice coil depth and Hg is the gap depth.
  7. Vb: Net internal volume of box after subtracting the volume of internal objects.